

N4.115

Kubota
Base


84,6 kW (115 hp)

ULTRA LOW
EMISSION



The engine illustrated above is not necessarily identical to the standard production engine. The specifications are subject to change without notice.

The specifications are defined for marine pleasure use. For every other application, please consult us.

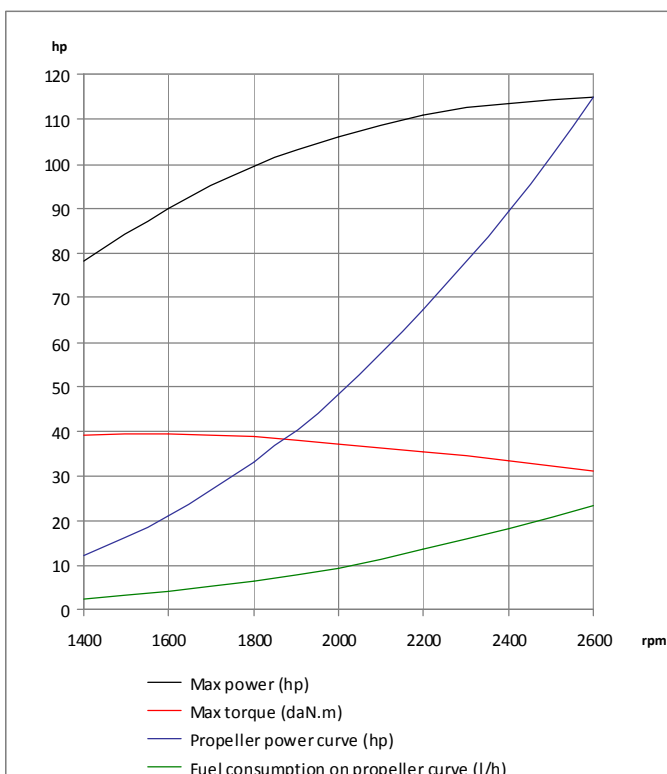

Technical specifications

Power *	84,6 kW (115 hp)
Max RPM *	2600 RPM
Displacement	3,769 litres (183 ci)
Number of cylinders	4 in line
Bore and stroke	100 mm x 120 mm (3,93" x 4,72")
Compression ratio	21,8:1
Combustion system	Direct (E-CDIS)
Intake	Turbo intercooler
Cooling	Heat exchanger
El. equipment / Alternator	12 V / 100A
Instrument panel	C3
Transmission	Hydraulic or mechanic
Engine Max Install. Angle	7° (dynamic)
Dry weight (with TM345A)	378 kg (833,35 lb)

Connections

Exhaust	104 mm (4,09")
Fuel	8 mm (0,31")
Sea Water	32 mm (1,26")

* At engine flywheel, according to ISO 8665-1


N4.115

84,6 kW (115 ch)

Kubota

Base

- Line drawings -

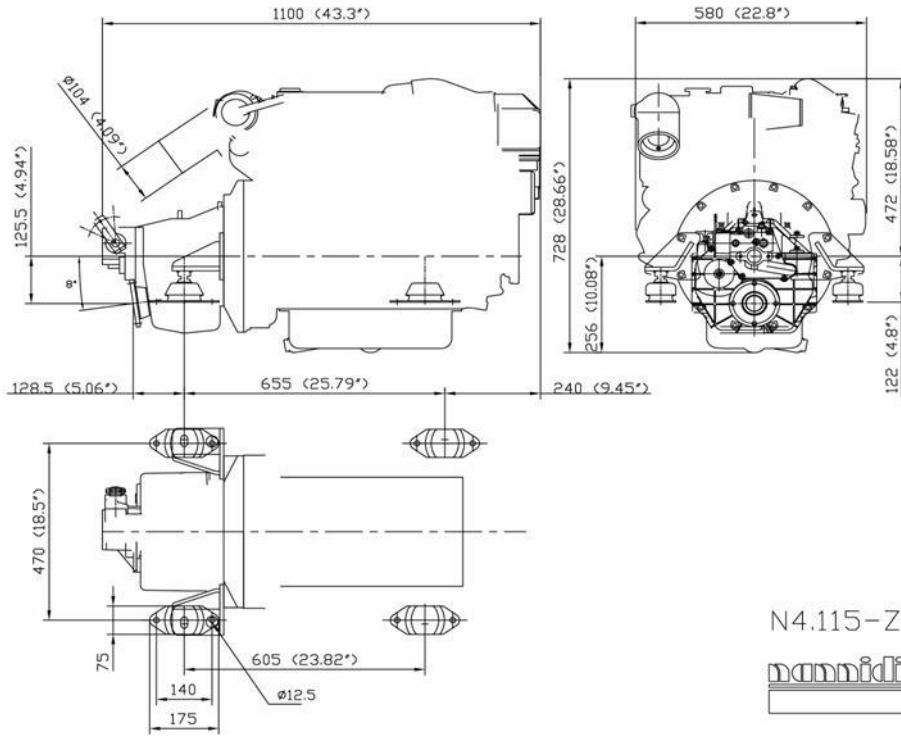

energy in blue

nannidiesel

MOTUL

NANNI DIESEL utilise et recommande

STANDARD EQUIPMENT

- C 3 luxe instrument panel
 - Tachometer /Hour meter
 - Oil pressure Warning light and acoustical alarm
 - Water temperature Warning light and acoustical alarm
 - Alternator pilot light
 - Glow plug pilot light
 - Water temperature indicator
 - Oil pressure indicator
 - Voltmeter
 - Ignition start key
- Warranty certificate
- Exhaust elbow with water injection
- Heat exchanger
- Electric braid 4 meters
- Fuel filter
- Oil filter
- Hydraulic gearbox A, H or V
- Owner's manual
- Sea water pump
- Fresh water pump
- In line injection pump
- Fuel feed pump
- Oil extraction pump
- Control cables mounting points
- Electric stop
- Engine flexible mounts
- Electric system 12 V
- Thermostat

OPTIONAL EQUIPMENT

- Two pole electrical system
- Pulley
- Trolling valve on hydraulic gearbox
- Additional alternators
- Keel cooling

OPTIONAL ACCESSORIES

- Sea water hoses
- Fuel hoses
- Sea water filter
- Remote control
- Flexible coupling
- Exhaust system



C3 - 270 x 188 mm

DEALER'S STAMP



BUREAU VERITAS

Quality

MARINE ACCESSORIES
by Nanni Diesel

www.nannidiesel.com